


User Guide

Tasmota is not a commercial product and support is limited. You have to be willing to research and solve potential problems yourself.

Detailed information about connecting, changing settings and modifications is shown on the website "<https://tasmota.github.io/docs/>"

- Power on
- ON/OFF operating principle: The connected appliances work/stop through live wire power on/off.

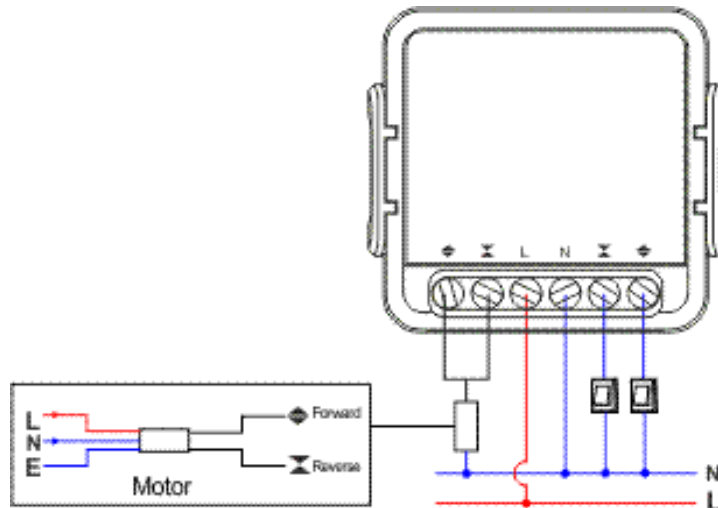

Note: The S1 and S2 must be connected to Neutral

How to connect:

1. Plug in the device
2. Find open wifi hotspot with Tasmota word in name
3. Connect to it and go to 192.168.4.1 address in browser
4. Enter your wifi network name and password
5. After confirming network data, power strip will show you IP address that it will be available from, copy it, just in case.
6. It will automatically redirect you to this address after you network data is filled and saved.
7. Power strip is ready to use. Template and rules already activated, but in case you will need it later - you can find it below

Template Parameters:

```
{"NAME":"Smart WiFi Curtain Module  
L12T","GPIO":[1,161,1,160,225,224,1,1,544,1,32,1,1,1],"FLAG":0,"BASE":18}
```

Smart WiFi Curtain Module L12T

Tasmota

Template parameters

Name

Based on

GPIO0	User		
GPIO1	Switch	2	
GPIO2	User		
GPIO3	Switch	1	
GPIO4	Relay	2	
GPIO5	Relay	1	
GPIO9	User		
GPIO10	User		
GPIO12	LedLink		
GPIO13	User		
GPIO14	Button	1	
GPIO15	User		
GPIO16	User		
GPIO17	User		

Save

Using this template turns the unit into a simple 2-gang switch (eg. L13 [2 gang]).

To operate the unit as a roller shutter switch, the following commands should be issued:

- enable SetOption80 1
- activate ShutterRelay1 1
- Interlock 1,2
- Interlock ON
- set the switches to follow and inverse `SwitchMode1 4` and `SwitchMode2 4`. Check [SwitchModes documentation](#) for details.
- Then the device should be calibrated for the distance of your curtains, have a look at [Blinds and Shutters](#) configuration page.

How to convert switch module to curtain module

if there is power button:

Hold the power button 40+ seconds, untill light blinks and device restarts

if there is no power button:

Plug the device in and out 6 times and leave plugged in on the 7th - LED should start to blink, that means socket is ready to be connected again

if have access to the web interface:

type **reset 1** in console and press enter

Smart Home Intergrations

Tasmota is Incredibly expandable and flexible and can be integrated with:

Alexa, AWS IoT, Domoticz, Home Assistant, Homebridge, HomeSeer, IP Symcon, KNX, NodeRed, nymea, OctoPrint, openHAB, Otto, IOBroker, Mozilla WebThings Adapter, SmartThings, Tasmohab, Homematic ip, etc

for more info look here:

<https://tasmota.github.io/docs/Integrations/>