



Керівництво користувача

- Увімкніть живлення
- Принцип роботи ON/OFF: підключені прилади працюють/зупиняються через увімкнення/вимкнення живлення проводу під напругою.


1 gang

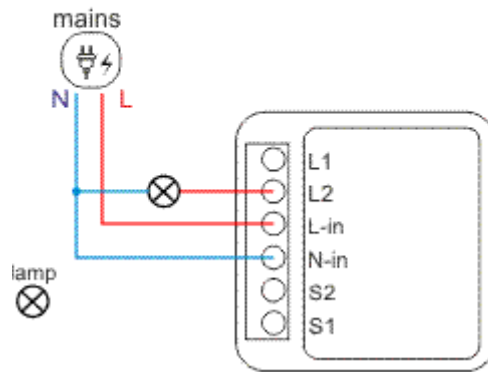

2 gang

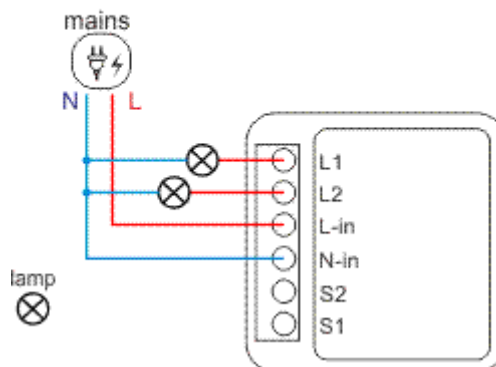

2 gang 1 way

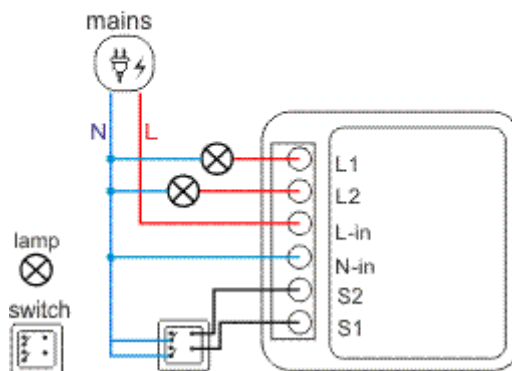

Як підключити:

1. Підключіть пристрій до мережі
2. Знайдіть відкриту точку доступу Wi-Fi зі словом Tasmota в назві
3. Підключіться до нього та перейдіть за адресою 192.168.4.1 у браузері
4. Введіть назву та пароль своєї мережі Wi-Fi
5. After confirming network data, power strip will show you IP address that it will be available from, copy it, just in case.
6. It will automatically redirect you to this address after you network data is filled and saved.
7. Power strip is ready to use. Template and rules already activated, but in case you will need it later - you can find it below

Template Parameters:

```
{"NAME":"NOUS Smart WiFi Switch Module L13T","GPIO":[1,161,1,160,225,224,1,1,544,1,32,1,1,1],"FLAG":0,"BASE":18}
```

Template parameters		
Name	NOUS Smart WiFi switch r	
Based on	Generic (18) ▼	
GPIO0	User ▼	
GPIO1	Switch ▼	2 ▼
GPIO2	User ▼	
GPIO3	Switch ▼	1 ▼
GPIO4	Relay ▼	2 ▼
GPIO5	Relay ▼	1 ▼
GPIO9	User ▼	
GPIO10	User ▼	
GPIO12	LedLink ▼	
GPIO13	User ▼	
GPIO14	Button ▼	1 ▼
GPIO15	User ▼	
GPIO16	User ▼	
GPIO17	User ▼	

Save

if there is power button:

Hold the power button 40+ seconds, untill light blinks and device restarts

if there is no power button:

Plug the device in and out 6 times and leave plugged in on the 7th - LED should start to blink, that means socket is ready to be connected again

if have access to the web interface:

введіть **reset 1** у консолі та натисніть enter

Розумний дім

Tasmota неймовірно розширювана та гнучка і може бути інтегрована з:

Alexa, AWS IoT, Domoticz, Home Assistant, Homebridge, HomeSeer, IP Symcon, KNX, NodeRed, nymea, OctoPrint, openHAB, Otto, IOBroker, Mozilla WebThings Adapter, SmartThings, Tasmohab, Homematic ip тощо